

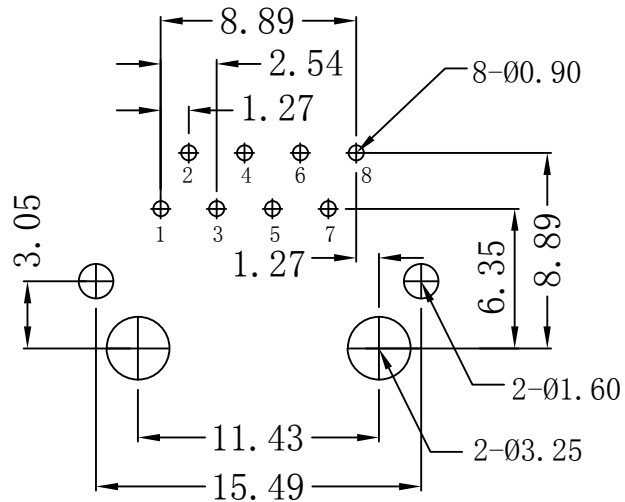


Mechanical :

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010/06/24	

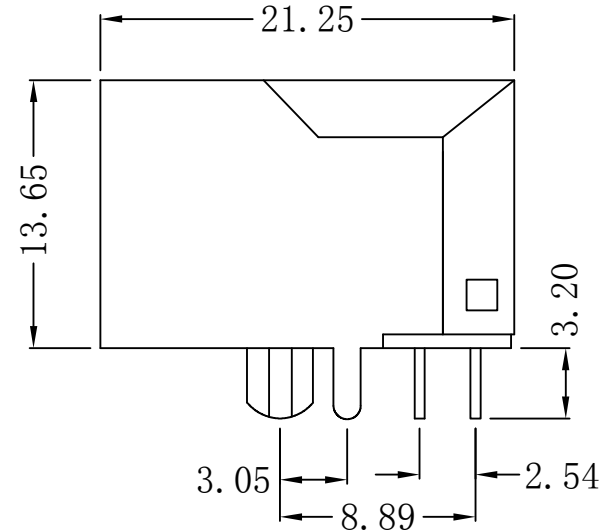

SUGGESTED PCB LAYOUT (TOP VIEW)

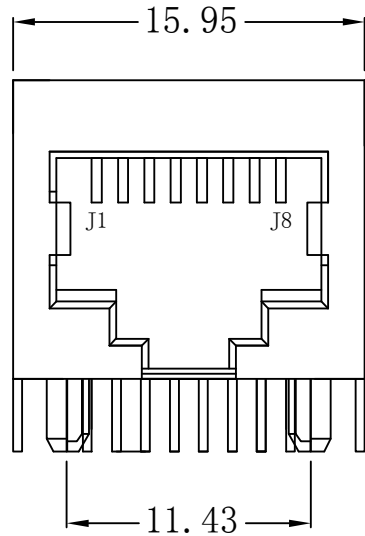

PCB JACK Electrical:

1. Insulation Resistance: 500 Megohms Min@500VDC.
2. Dielectric Strength: 1000VAC RMS 50Hz 1Min.
3. Operating: 750 Cycles Min.
4. Plating Gold Thickness:
Gold Flash/1.5u"/3u"/6u"/15u"/30u"/50u"

Environmental:

1. Temperature Range: -40°C ~ +85°C.

X:X	±0.20	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX	±0.10	CHKD:	
X:XXX	±0.05	DR: TOM	TITLE: RJ45 1×1 Connector
ANGLES	±1°	UNIT: mm	PART NO.: LPJE160DNL
	SCALE: 2/1	SHEET: 1/1	REV: A
			DWG: LP10061229

Sales Department A-B2

Sales Engineer / Summer Ming - 明夏

Tel: 0086-752-3322915 Mob: 0086-180-2668-6530


Fax: 0086-752-3161926

E-mail: Summer@link-pp.com

www.link-pp.com

LINK- PP INT'L TECHNOLOGY CO., LIMITED

Jia An Industrial Park, Chenjiang Rd, Zhongkai Hightech Zone, Huizhou City,
516003, China



LINK- PP INT'L TECHNOLOGY CO., LIMITED

Seris : LPJXXXXXXXX/ LPXXXXXXXX/ LPAXXXXXXX